

# KERSPLASH™ 3 PANEL CLIMBING WALL REMOVABLE BOTTOM CATALOG#: 160552

THE KERSPLASH™ POOLSIDE CLIMBING WALL WILL CONSIST OF THE FOLLOWING COMPONENTS:

**SUPERSTRUCTURE:**  
THE STRUCTURE SHALL CONSIST OF A 14' TALL FRAME. THE FRAME WILL INCLUDE AN 12' TALL SECTION FOR CLIMBING WITH THE UPPERMOST 4' SECTION ANGLED TOWARDS THE WATER AT 15 DEGREES. THE TOP 2' NON-CLIMBABLE SECTION OF THE CLIMBING WALL SHALL BE VERTICLE. THE SUPERSTRUCTURE OF THE WALL SHALL BE CONSTRUCTED EXCLUSIVLY FROM 304L (LOW CARBON CONTENT) STAINLESS STEEL RAW MATERIALS, MANUFACTURED AND FORMED IN THE UNITED STATES WITH OVERALL DIMENSIONAL SIZE TOLERANCES OF +/- 1/16" INCH. PANEL BRACKETS SHALL BE FACRICATED FROM 12 GAUGE 304 STAINLESS STEEL SHEETS AND TIG WELDED PERMANENTLY TO THE FRAME STRUCTURE. THE LOWER SECTION OF THE FRAME SHALL BE REMOVABLE. ALL STAINLESS STEEL COMPONENTS SHALL BE COATED WITH SPECTA SHIELD™ TO WITHSTAND THE AQUATIC ENVIRONMENT.

**PANELS:**  
KERSPLASH CRYSTAL CLEAR™ PANELS SHALL BE FABRICATED OF OUTDOOR RATED, DOUBLE SIDE UV PROTECTED, POLYCARBONATE FOR SUPERIOR STREANGTH AND IMPACT RESISTANCE. PANELS SHALL HAVE 6 SLOTS ON THE PERIMETER FOR MOUNTING THE FRAME AND 9 CAPTIVE FASTENERS TO ALLOW FOR HANDHOLD MOUNTING. PANELS SHALL BE 4' BY 4' DIMENSIONALLY (+/- 1/16") AND ALL SHARP EDGES MECHANICALLY ROUNDED. THE TOP 2' PANEL SHALL HAVE NO HAND HOLDS OR GRASPABLE SURFACE FEATURES TO DETER CLIMBING ABOVE THE DESIGNATED CLIMBING PANELS. ALL PANELS SHALL BE CAPABLE OF WITHSTANDING THE AQUATIC ENVIRONMENT.


**HOLDS:**  
EACH CLIMBING PANEL SHALL COME WITH 9 HAND HOLDS. HAND HOLDS SHALL BE FABRICATED FROM A PROPRIETARY HYBRID RESIN WITH A FORMULATED UV-INHIBITED BLEND SPECIFICALLTY ENGINEERED FOR THE AQUATIC ENVIRONMENT. HAND HOLDS SHALL BE YELLOW, RED OR ORANGE IN RANDOM QUANTITIES. EACH HAND HOLD SHALL HAVE AN IMBEDDED STAINLESS STEEL WASHER.

**ANCHORS:**  
THE ANCHORS SHALL BE ENGINEERED TO WITHSTAND 90 MPH WIND LOAD WITH A SAFETY FACTOR, AND ANY FORCES INDUCED BY CLIMBING. THE ANCHORING SYSTEM SHALL CONSIST OF QTY. 4 304L COLD FORMED STAINLESS STEEL BRACKETS THAT CLAMP THE CLIMBING FRAME WITH 18-8 STAINLESS STEEL 1/2"-13 HEX BOLTS. HEX BOLTS SHALL BE INSTALLED INTO EPOXY SET FEMALE THREADED ANCHORS SET PER THE MANUFACTURER INSTRUCTIONS

**FASTENERS:**  
ALL FASTENERS SHALL BE 18-8 S.S. AND CONNECTION POINTS OTHER THAT HAND HOLDS SHALL HAVE NYLOCK LOCKING ELEMENT NUTS.

**FOOTING REQUIREMENTS:**  
THE FOOTING REQUIREMENTS SHALL BE BASED ON A 90 MPH WIND LOAD, STANDARD 4" THICK POOL DECK SHALL BE SUFFICIENT.

**WARRENTY:**  
LIMITED ONE YEAR WARRANTY, AS SUPPLIED BY SPECTRUM AQUATICS.

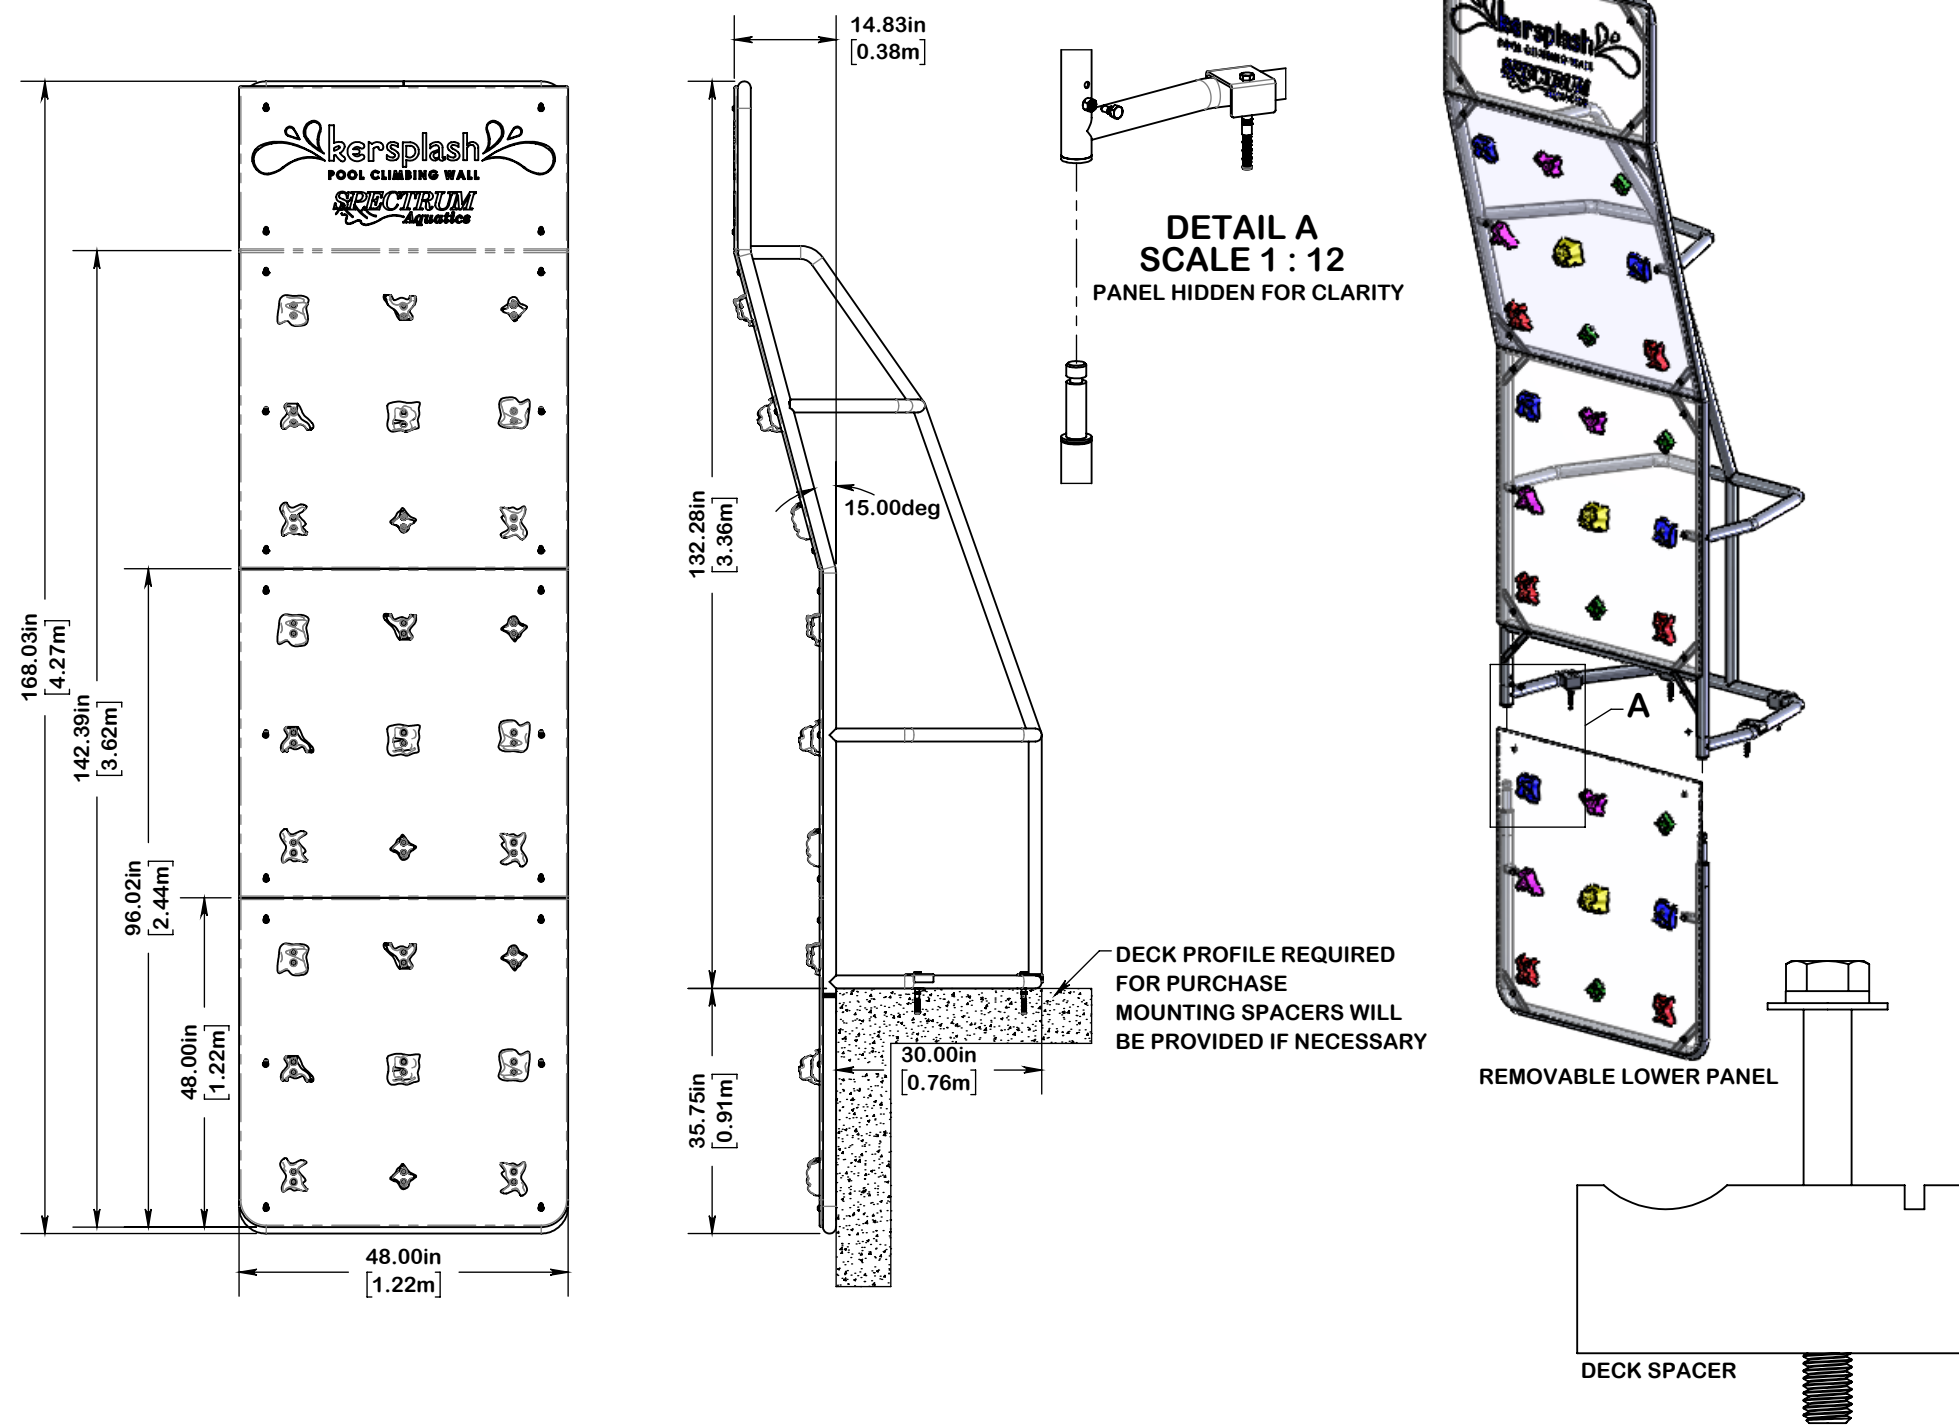

A PLAYCORE Company  
7100 Spectrum Lane Missoula, Montana 59808  
800.791.8056 www.spectrumaquatics.com

## ENGINEERING DATA

PRODUCT:	KERSPLASH 3PANEL REMOVABLE - 12'TALLx4'WIDE			
MODEL #:	160552	CATALOG #:	160552	REVISION: A
MATERIAL:	1.90"x.109" 304L S.S. ROUND TUBE			
FINISH #:	PASSIVATE IAW ASTM A967			

**NOTE:**  
DIMENSIONS VARY WITH SPECIFIC APPLICATIONS. SPECIFICATIONS ARE NOMINAL AND ARE SUBJECT TO CHANGE. PLEASE CONTACT SPECTRUM AQUATICS FOR CUSTOM APPLICATIONS